


ZS-M35

MINIDISC BOOMBOX

- MD BOOMBOX W/MD/CD DIGITAL TUNER
- HIGH QUALITY SOUND FROM COMPACT BODY
- CD TEXT TRANSFER WHEN RECORDING TO MD
- MOTORIZED CD LID
- CD-TO-MD ONE TOUCH RECORDING
- SYNCHRO RECORDING
- REMOTE COMMANDER® REMOTE CONTROLLER SUPPLIED
- MEGA BASS® SOUND SYSTEM
- DIGITAL SYNTHESIZED AM/FM STEREO TUNER
- 20 STATION PRESET TUNING
- SLEEP TIMER AND TIMER RECORDING CAPABILITY

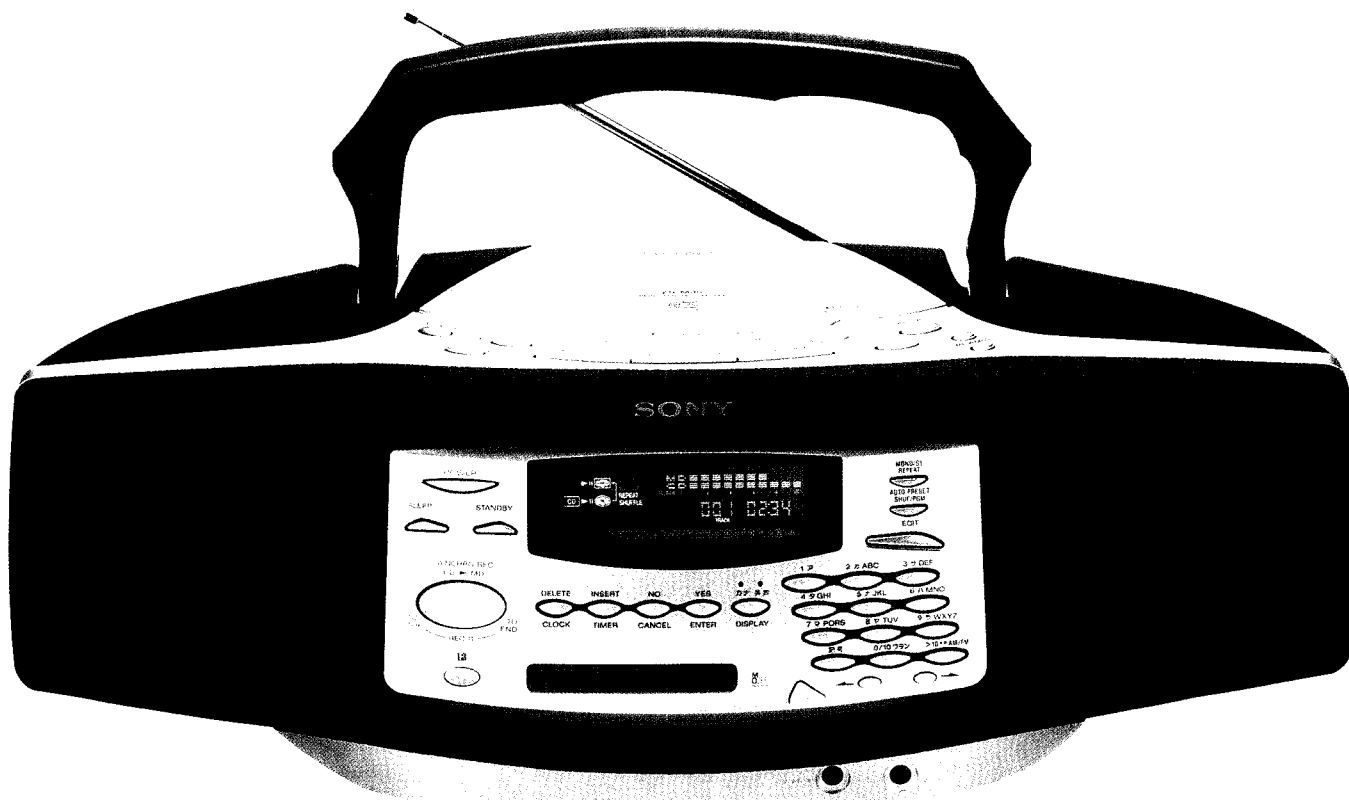

ZS-M35

FEATURES

- **MD BOOMBOX W/MD/CD DIGITAL TUNER**
- **HIGH QUALITY SOUND FROM COMPACT BODY**
with very wide dynamic range and remarkable power output
- **CD TEXT TRANSFER WHEN RECORDING TO MD***
ensures that all CD information is also recorded on the MiniDisc for identification and access
- **MOTORIZED CD LID** operates smoothly for easy insertion and removal of compact discs
- **CD-TO-MD ONE TOUCH RECORDING** requires just the press of a single button to activate recording directly from a compact disc to a MiniDisc*
- **SYNCHRO RECORDING** lets you make digital copies of CDs onto a MiniDisc* with synchronized operation that begins recording when digital input signal is received
- **REMOTE COMMANDER® REMOTE CONTROLLER SUPPLIED** provides the convenience of direct remote control of the system functions including AM/FM tuning, track selection, volume, and power on/off
- **MEGA BASS® SOUND SYSTEM** produces rich, deep bass tones for more powerful sound
- **DIGITAL SYNTHESIZED AM/FM STEREO TUNER** precisely locks in the most powerful signal for accurate, drift-free reception
- **20 STATION PRESET TUNING** offers convenient one-button tuning of your choice of 15 FM stations and 5 AM stations
- **SLEEP TIMER AND TIMER RECORDING CAPABILITY** lets you fall asleep or awaken to CD, MD, or radio when you set the built-in digital clock to turn off the unit or awaken you at preset times, and also allows recording to start and stop at predetermined times

SPECIFICATIONS

FORMAT: MiniDisc (MD)

SAMPLING FREQUENCY: 44.1 kHz

DATA COMPRESSION METHOD (CODING): ATRAC Adaptive Transform Acoustic Coding

MD FREQUENCY RESPONSE: 20-20,000Hz ± 3 dB

WOW & FLUTTER: Unmeasurable

FORMAT: Compact Disc (CD)

DIGITAL FILTER: 8X Oversampling

DIGITAL TO ANALOG CONVERSION: 1 Bit

CD FREQUENCY RESPONSE: 20-20,000Hz, ± 1.2 dB

TUNER FREQUENCY RANGE: AM: 530-1710kHz

FM: 87.6-108MHz

ANTENNA SYSTEM: AM: Built-in Ferrite Bar Antenna

FM: Telescopic Antenna

SPEAKERS: 4" (10cm) Full Range x 2

OUTPUTS: Headphone (stereo mini jack)

POWER REQUIREMENTS: AC: 120V 60Hz

Remote Control: 3V DC ("AA" batteries x 2, optional)

COLOR: Black

DIMENSIONS (WHD): TBD

WEIGHT: 8 lb 12 oz (4kg)

SUPPLIED ACCESSORIES: Remote Commander Remote Control,
AC Power Cord (Built-in)

©1999 Sony Electronics Inc.

Reproduction in whole or in part without written permission is prohibited. All rights reserved. Sony, Mega Bass, Micro Dynamic Receiver, Remote Commander and the MiniDisc logo are trademarks of Sony.

Features and specifications are subject to change without notice. Non-metric weights and measures are approximate.

*MiniDisc products sold by manufacturer-authorized outlets include the Serial Copy Management System which will not prevent you from making a direct digital-to-digital copy from a digital source but such copies will prevent a second digital-to-digital copy from being made.

SONY

Sony Electronics Inc.
1 Sony Drive
Park Ridge, New Jersey 07656
<http://www.sony.com>

Printed in USA 1/99